

## Metso Outotec Lokotrack® LT1213™

# Recycled material crushing with high reduction ratio

Lokotrack LT1213 mobile horizontal impact crusher (HSI) combines mobility, high capacity and versatility. It is suitable for a various applications such as limestone processing and recycled materials crushing.

### Hydraulically foldable hopper

Wear resistant curved hopper sides  
Patented locking mechanism  
Extensions for more volume

### Grizzly feeder / Pan feeder + scalper

Automatic speed control (or via radio remote)  
Efficient material flow with high stroke vibrating unit  
Wear resistant feeder bottom (rubber as an option)

### Variable recycling options

Hydraulically adjustable magnet for metal separation  
Pan feeder under crusher for improved material flow

### NP1213M impact crusher

Hydraulically adjusted setting during process  
Wide variety of blowbars for different materials  
Easy-to-use hydraulic opening for safe rotor service

### H12-11 or H12-14 main conveyor

Hydraulic driven belt conveyor with steel enforcing  
Extended conveyor for more discharge height

### Rotating H5-4 side conveyor

Quick to setup for transport  
Discharge on both sides  
High speed for stockpile capacity

### Heavy-duty tracks and frame


FEM designed structure for optimized weight and lifetime  
Open frame design for easy service access  
Agile tracks with 2-speed mode for turnability and speed

### Fuel-efficient CAT® C9.3B power transmission

Direct drive for crusher with purposely designed gearbox and hydraulic clutch for high reliability  
Optimized hydraulics efficiency  
Reduced hydraulic oil volume 215 l (57 gal)

### IC process control for connectivity

Radio remote for feeder control and tracking  
ICr Connection between multiple units  
Metso Outotec Metrics for remote process monitoring

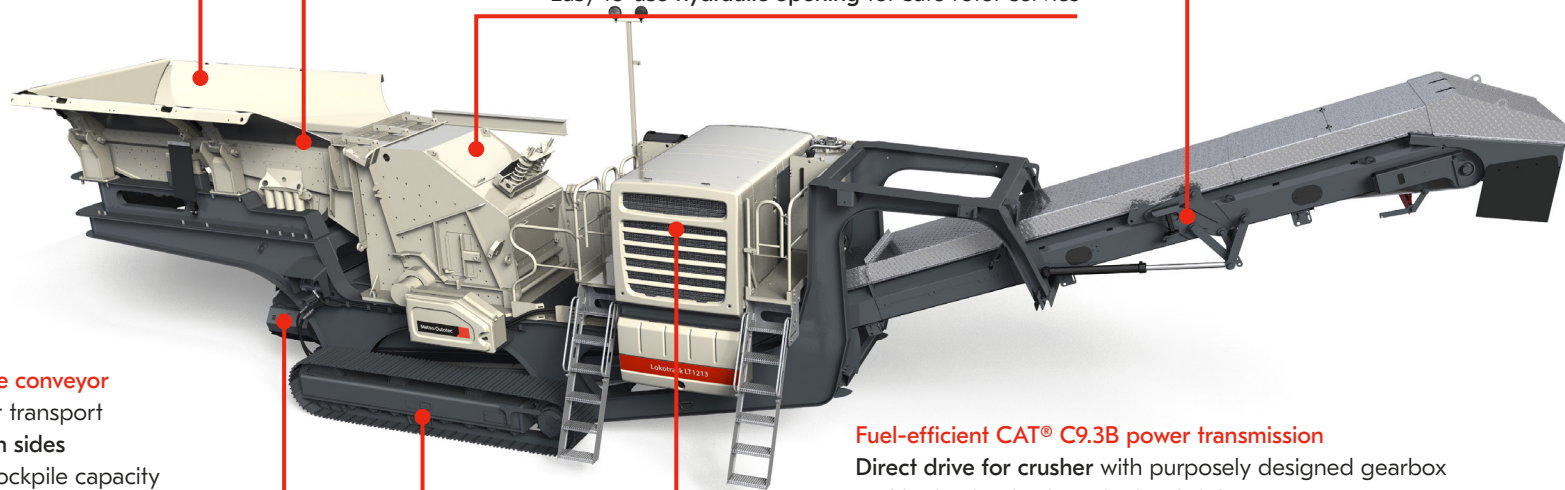

# Technical specifications

Metso:Outotec

Transport dimensions		
Weight	46,000 kg	101,000 lbs
Length	15,600 mm	51'
Width	3,000 mm	9'10"
Height	3,630 mm	11' 11"
Feeder		
TK11-42		
Hopper volume	6 / 9 m <sup>3</sup>	78 / 11.8 yd <sup>3</sup>
Width	1,100 mm	43"
Loading height	3,800 mm	12' 6"
Loading width	2,600 / 3,600 mm	8' 6" / 11' 10"
Side conveyor		
H5-4		
Width	500 mm	20"
Length	4,000 mm	13' 2"
Discharge height	1,450 mm	4' 9"
Crusher		
Nordberg® NP1213M™		
Feed opening	1,320 x 990 mm	52" x 39"
Drive type	Direct	Direct
Process control	IC	IC
Main conveyor		
H12-11 / H12-14		
Width	1,200 mm	3' 11"
Length	11,000 / 14,000 mm	36' 1" / 45' 11"
Discharge height	2,950 / 4,000 mm	9' 8" / 13' 1"
Power unit		
CAT® C9.3B		
Power	310 kW	416 hp
Fuel /hydr.oil vol.	630 / 215 l	166 / 57 gal
Options		
Additional service platform	Hydraulic Power Takeoff	
Bypass filter for lubrication/ hydraulic oil	Hydraulic setting adjustment	
Climate kit (hot/cold)	ICr remote process control	
Discharge hood for conveyors	Interlocking cable	
Dust encapsulation for conveyors	Magnetic separator	
Extended main conveyor	Metso Outotec Metrics	
Feed hopper extensions	Pan feeder and scalper	
Filter kit	Pan feeder under crusher	
Fuel filling pump	Pre-heater for diesel engine	
High pressure water spraying	Remote radio control	
Hydraulic generator	Side conveyor	



## Applications



Concrete, demolition waste



Recycled asphalt



Soft and medium-hard rock

## Combine with

- LT200HP cone crusher
- ST2.8 mobile screen for recycling jobs
- ST3.8 and ST4.8 for aggregate production