

# MELLOTT®

## TECHNICAL DATA – MC106P



### VIBRATING GRIZZLY FEEDER

- 42"x17' Vibrating Feeder
- 5' Grizzly Section w/ Adjustable Bars
- 12' Long Pan w/ Replaceable ½" AR Liners
- 40 HP, 1200 RPM, TEFC Electric Motor

### JAW CRUSHER

- Metso C106 Jaw w/ Integral Motor Mount
- Feed Opening 42" Wide x 28" Deep
- 150 HP, 1200 RPM TEFC Crusher Duty Motor
- Closed Side Setting 2 ¾" – 8"
- Composite Guards, Crusher Feed Chute

### CHASSIS

- Heavy Duty Fabricated Frame Complete w/ Cribbing Supports
- Tri-Axle Suspension w/ Twelve 11R24.5 Tires
- Road Ready w/ Airbrakes and Mud Flaps

### UNDER CRUSHER CONVEYOR


- 42" BW x 30' Long Conveyor
- 15 HP Motorized Head Pulley
- Channel Frame Construction
- CEMA C5 Idlers
- 4' Long Impact Bed at Loading Zone
- Belt Scraper

### AVAILABLE OPTIONS

- Pre-Wired Plant with Electric Starter Panel
- Hydraulic Lifting Legs
- Breaker w/ Support Structure

# MELLOTT®

## TECHNICAL DATA – MC106P

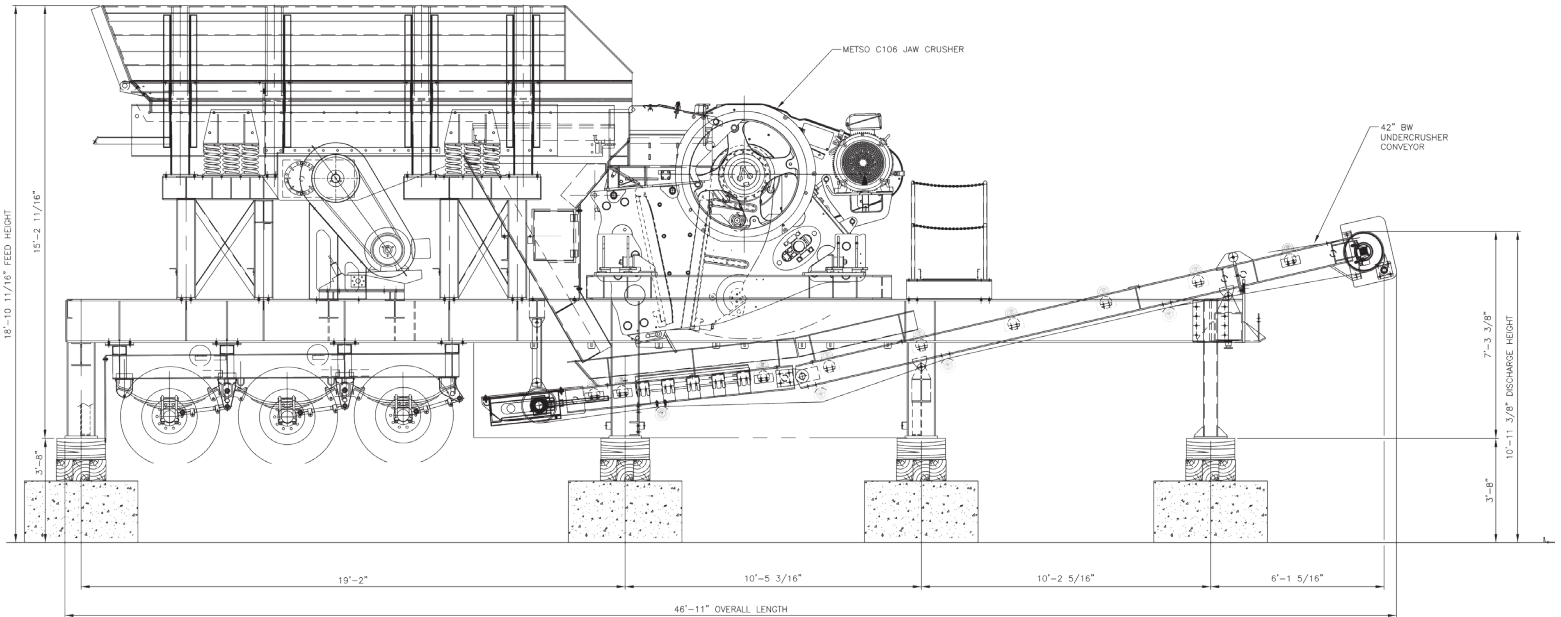

### CRUSHER

- Maximum Plant Capacity – 550 STPH at 8" Closed Side Setting

### PHYSICAL/OPERATING CHARACTERISTICS

- Overall Operating Length – 46'-11"
- Overall Operating Height – 21'-1" (with 3'-8" cribbing)
- Operating Feed Height – 18' – 10 11/16" (with 3'-8" cribbing)
- Operating Discharge Height – 10' – 11 3/8" (with 3'-8" cribbing)
- Travel Height – 13'-6"
- Travel Width – 9'-0"

**Total Unit Weight (estimated).....105,000 lbs**

Specifications are subject to change without notice.

Model MC106P 032024

**MAIN OFFICE**  
100 MELLOTT DRIVE  
WARFORDSBURG, PA 17267

**SOUTHERN SERVICE CENTER**  
169 MACHINE SHOP ROAD  
MARION, NC 28752

**CUSTOMER SERVICE HOTLINE: 800-634-5634 ■ EMAIL: SALES@MELLOTTSCOM**

**VISIT US @ WWW.MELLOTTCOMPANY.COM**