

# MELLOTT®

## TECHNICAL DATA- MC6203D



### CHASSIS

- Heavy Duty Fabricated Frame w/ Cribbing Supports
- Fold Down Kingpin Cribbing Supports
- Tandem Axle Suspension w/Eight IIR 24.5 Tires
- Road Ready (Airbrakes, Mud Flaps)
- Access Stair

### SCREEN

- Metso FS303
- Adjustable Motor Base
- Right Hand Drive
- 50 HP Motor
- Replaceable Feed Box & Discharge Lip Liners
- Deck Design for Side Tensioned Media

### CHUTES AND HOPPERS

- 1/4" MS Fines Hopper w/ Bolted 1/4" AR Liners
- 1/4" MS Discharge Chute w/ 1/4" AR Liners
- Oversize discharge chute with two (2) sets of finger gates for blending.
- Reversible Discharge Chutes

### UNDER SCREEN FINES CONVEYOR


- 60" Horizontal Fines Conveyor  
25'-3" Long
- Dodge 10 HP Motorized Gearbox/  
Pulley
- Manual Screw Take-ups
- Primary Belt Cleaner
- Channel Frame Construction

### AVAILABLE OPTIONS

- Pre-Wired Electrical Starter Panel
- Hydraulic Leveling Legs w/ Power Pack
- Screen Media/Installation



# MELLOTT®

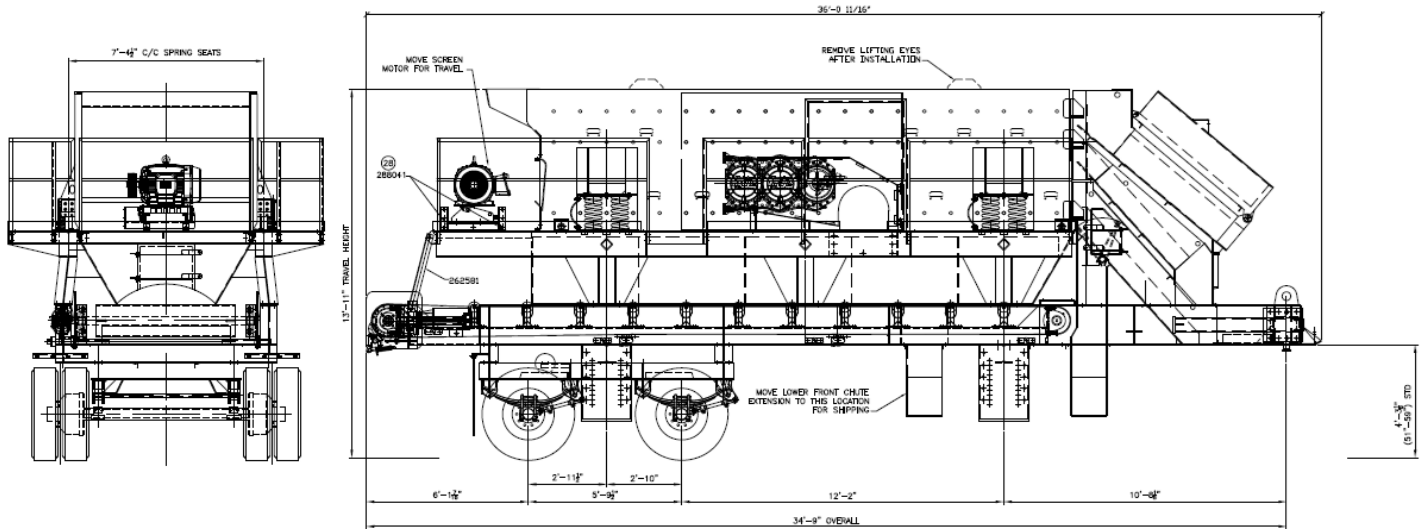

Basic Model Shown

## PHYSICAL/OPERATING CHARACTERISTICS

- Overall Length . . . . . 37'-7<sup>1</sup>/<sub>8</sub>"
- Overall Height . . . . . 13'- 11"
- Operating Width . . . . . 12'-8<sup>9</sup>/<sub>16</sub>"
- Ground Clearance . . . . . 1'-5<sup>5</sup>/<sub>8</sub>"
- Travel Width . . . . . 11'-10<sup>1</sup>/<sub>8</sub>"
- Top Deck OS Chute Discharge Height. . . . . 4'-3<sup>3</sup>/<sub>4</sub>"
- Fines Discharge Height . . . . . 1'-8"
- Screen Discharge Chute Height . . . . . 1'-6<sup>11</sup>/<sub>16</sub>"
- Under Screen Fines Conveyor Discharge Height . . . . . 8'-10<sup>5</sup>/<sub>16</sub>"

Total Unit Weight.....53000 Lbs

Specifications are subject to change without notice.

Model MC6203D 032024

100 MELLOTT DRIVE, WARFORDSBURG, PA 17267 ■ WWW.MELLOTTCOMPANY.COM

AGGREGATE, SLAG, CONSTRUCTION AND POWER INDUSTRIES

FOR MORE INFORMATION CONTACT

800-634-5634

SALES@MELLOTT.COM