

MELLOTT®

TECHNICAL DATA - MC120P



VIBRATING GRIZZLY FEEDER

- Metso HR 46'x20' Vibrating Feeder
- 40 HP, 1800 RPM, TEFC Electric Motor
- 14' Pan w/ Replaceable ¾" AR Liners
- 6' Grizzly Section w/ Adjustable Bars @ 4" Openings

JAW CRUSHER

- Metso C120 Jaw w/ Integral Motor Mount
- Feed Opening 47"(W)x34"(D)
- 200 HP Crusher Duty Motor 1200 RPM, TEFC
- Closed Side Setting 2 ¾"-8"
- Composite Guards, Crusher Side Feed Chute

CHASSIS

- Heavy Duty Fabricated Frame Complete with Cribbing Supports
- Triple Axle Suspension w/ 12 11R24.5 Tires
- Road Ready (Airbrakes, Light Kit, Mud Flaps)

UNDER CRUSHER CONVEYOR


- 20 HP, 48" (W)x 34'(L) Conveyor
- Channel Frame Construction
- CEMA C5 Idlers
- Rubber Impact Idlers @ Load Zone

AVAILABLE OPTIONS

- Hydraulic Breaker and Support Structure
- Control House
- Pre-Wired Electrical Starter Panel
- Additional Hopper Capacity up to 39 Cubic Yards
- Hydraulic Leveling Legs w. Power Pack

MELLOTT®

TECHNICAL DATA - MC120P

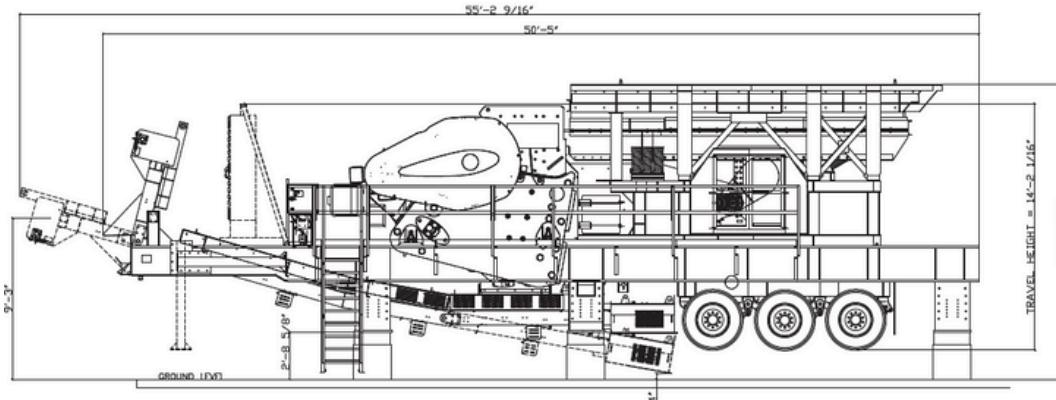

Basic Model Shown

*Travel height does not include feeder stand. Feeder stand to ship separate.

CRUSHER

- Max Feed Size.....27"
- Maximum Plant capacity.....600 STPH

PHYSICAL/OPERATING CHARACTERISTICS

- Overall Length.....55'9"
- Overall Height.....16'-11 1/2"
- Travel Height.....14'-2"
- Ground Clearance.....5 1/2"
- Travel Width.....11'-10"
- Feed Height.....16'-11 1/2"
- Discharge Height.....9'-2"
- Trailer 1 Weight.....102,200 lbs

Total Unit Weight139,451 lbs

Specifications are subject to change without notice

MAIN OFFICE
100 Mellott Drive
Warfordsburg, PA 17267

SOUTHERN SERVICE CENTER
169 Machine Shop Rd.
Marion, NC 28752

KASTROCK
2520 McJunkin Rd.
Lakeland, FL 33803

NORX
55 Boulderbrook Circle
Lawrenceville, GA 30045

SOUTHERN MACHINERY
3735 Vulcan Drive
Nashville, TN 37211

CUSTOMER SERVICE HOTLINE: 800.634.5634 VISIT US AT MELLOTTCOMPANY.COM

EMAIL: SALES@MELLOTT.COM