


MELLOTT®

TECHNICAL DATA - MC130P

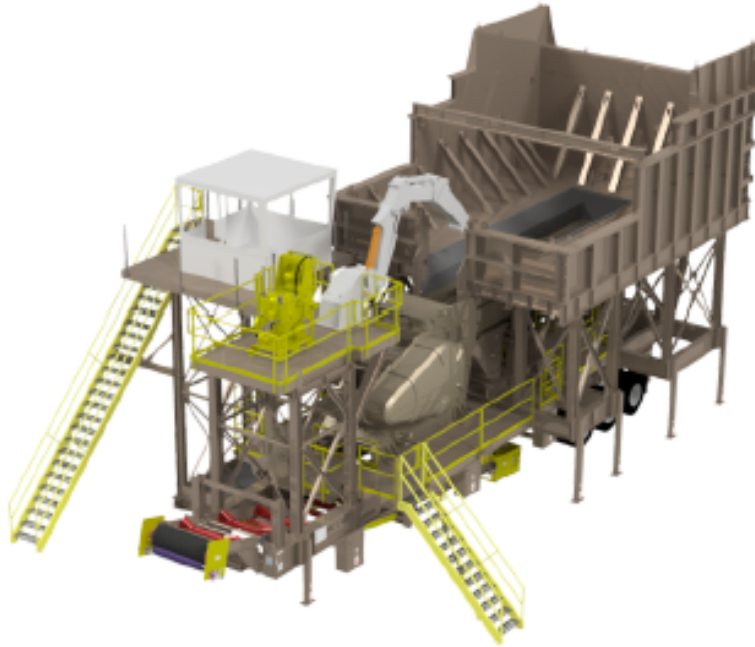

VIBRATING GRIZZLY FEEDER

- Metso HR 52"x24' Vibrating Feeder
- 50 HP, 1800 RPM, TEFC Electric Motor
- 16' Pan w/ Replaceable ¾" AR Liners
- 8' Grizzly Section w. Adjustable Bars

JAW CRUSHER

- Metso C130 Jaw w/ Integral Motor-Mount
- Feed Opening 51"(W) x 39"(D)
- 250 HP Crusher Duty Motor 1200 RPM, TEFC
- Closed Side Setting 4" - 10"
- Composite Guards, Crusher Feed Chute

CHASSIS

- Heavy Duty Fabricated Frame Complete w/ Cribbing Supports
- Triple Axle Suspension w/ 12 11R24.5 Tires
- Road Ready (Air Brakes, Light Kit, Mud Flaps)

UNDER CRUSHER CONVEYOR


- 30 HP 48"(W) x 35'(L) CONveyor
- Channel Frame Construction
- CEMA C5 Idlers
- Rubber Impact Bed @ Load Zone

AVAILABLE OPTIONS

- Hydraulic Breaker and Support Structure
- Control House
- Pre-Wired Electrical Starter Panel
- Hydraulic Leveling Legs w/ Power Pack

MELLOTT®

TECHNICAL DATA - MC130P

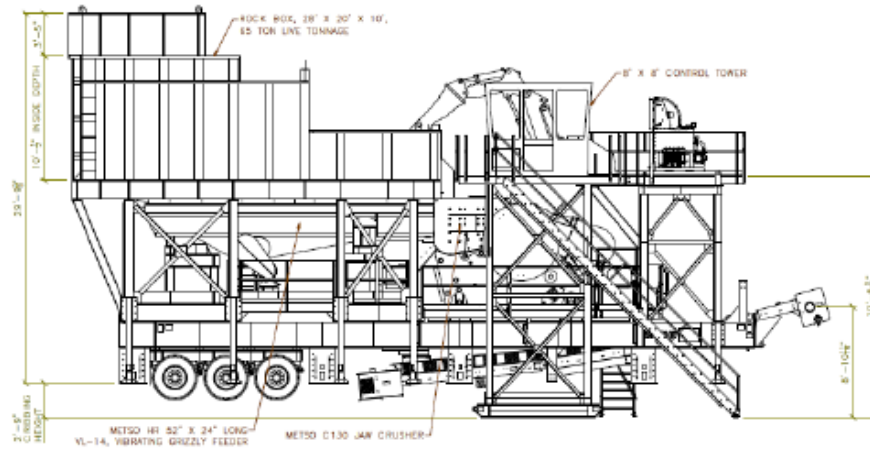

CRUSHER

- Max Feed Size.....27"
- Max Plant Cap.....600 STPH

PHYSICAL CHARACTERISTICS (CONVEYOR ONLY)

- Overall Length.....55'-9"
- Overall Height.....16'-11 1/2"
- Travel Height.....14'-2"
- Ground Clearance.....5 1/2"
- Travel Width.....11'-10"
- Feed Height.....16'-11 1/2"
- Discharge Height.....9'-2"
- Trailer 1 Weight.....102,200 lbs

Total Unit Weight139,451 lbs

Specifications are subject to change without notice

MAIN OFFICE
100 Mellott Drive
Warfordsburg, PA 17267

SOUTHERN SERVICE CENTER
169 Machine Shop Rd.
Marion, NC 28752

KASTROCK
2520 McJunkin Rd.
Lakeland, FL 33803

NORX
55 Boulderbrook Circle
Lawrenceville, GA 30045

SOUTHERN MACHINERY
3735 Vulcan Drive
Nashville, TN 37211

CUSTOMER SERVICE HOTLINE: 800.634.5634 VISIT US AT MELLOTTCOMPANY.COM
EMAIL: SALES@MELLOTT.COM